

Product Highlights

High-Speed Networking

Fast Ethernet ports allow you to connect up to 16 or 24 devices for fast file transfers and smooth media streaming

Intelligent Data Streaming

QoS support enables uninterrupted VoIP calls, smooth streaming video, and quick file transfers over your network

Energy Efficient

Uses 802.3az Energy Efficient Ethernet to reduce power usage automatically without sacrificing performance



DES-1016C/1024C

16/24-Port 10/100 Mbps Unmanaged Switch

Features

Fast Connectivity

- Sixteen (DES-1016C) or twenty-four (DES-1024C) Fast Ethernet LAN ports for high-speed wired connections
- Plug-and-play installation for convenience

Energy Efficient and Eco-Friendly

- Reduces power to a port when there is no traffic
- Optimizes power usage for a port for the length of cable connected to it
- Energy efficient design reduces heat generated and allows switch to run silently

The DES-1016C and DES-1024C 10/100 Mbps Unmanaged Switches are economical, plug-and-play networking switch solutions for SOHO and small and medium businesses wanting to benefit from the increased bandwidth of Fast Ethernet. They provide 16 or 24 10/100 Mbps ports that enable you to easily expand your network and provide a quick way to upgrade your network to fast connectivity.

Fast Networking Made Easy

With data transfer speeds of up to 200 Mbps at full duplex, these switches are ideal for quick file transfers, online gaming and smooth streaming media. They feature easy-to-access Ethernet ports with LED indicators per port to easily distinguish link status. Auto MDI/MDIX crossover makes connection a cinch; just plug in your cables and you're ready to go.

Conserve Energy

The DES-1016C and DES-1024C implement 802.3az Energy Efficient Ethernet, which saves energy and reduces heat automatically without sacrificing performance or functionality. The switches can detect when a connected computer is shut down or when there is no Ethernet traffic and can automatically reduce the power used for that port, cutting power usage substantially. In addition, the switch optimizes power usage for each port for the length of cable connected to it, using only as much power as is required. Both of these features work together to help you save power automatically.

Reliable Plug and Play Installation

The DES-1016C and DES-1024C are Plug-and-Play devices that require no configuration, so setup is simple and hassle-free, and you can easily connect multiple computers, share files, music, and video across your home or small office network, or even create a multiplayer gaming environment. 802.3x flow control on each port minimizes dropped packets when the port's receiving buffer is full, giving you a more reliable connection for all of your connected devices.

Smooth Streaming

These switches support QoS, which prioritizes network traffic so that time-sensitive data is delivered efficiently, even during bursts of high data traffic. This helps ensure an optimal experience for streaming media and VoIP calls.

DES-1016C




Sixteen 10/100 Fast Ethernet Ports

DES-1024C



Twenty-four 10/100 Fast Ethernet Ports

Your Network Setup

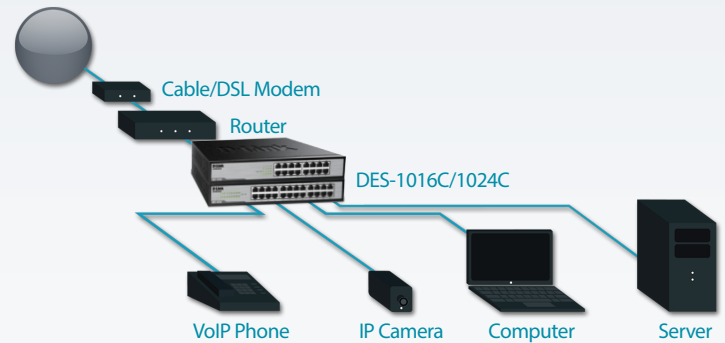

Technical Specifications

General	DES-1016C	DES-1024C
Device Interfaces	• 16 10/100 Mbps LAN ports	• 24 10/100 Mbps LAN ports
Standards	<ul style="list-style-type: none"> • IEEE 802.3 10BASE-T • IEEE 802.3u 100BASE-TX • IEEE 802.3x Flow Control • IEEE 802.1p QoS • IEEE 802.3az Energy-Efficient Ethernet (EEE) 	<ul style="list-style-type: none"> • IEEE 802.3 10BASE-T • IEEE 802.3u 100BASE-TX • IEEE 802.3x Flow Control • IEEE 802.1p QoS • IEEE 802.3az Energy-Efficient Ethernet (EEE)
Functionality	DES-1016C	DES-1024C
Switching Capacity	• 3.2 Gbps switching fabric	• 4.8 Gbps switching fabric
Advanced Features	<ul style="list-style-type: none"> • Auto MDI/MDIX crossover for all ports • Secure store-and-forward switching scheme • Full/half-duplex for Ethernet/Fast Ethernet speeds • Supports 9,216 byte jumbo frames • Back pressure at half-duplex operation • Wire-speed reception and transmission • Store and-Forward switching method • Auto-negotiation for each port • QoS (4 queues, strict mode) 	<ul style="list-style-type: none"> • Auto MDI/MDIX crossover for all ports • Secure store-and-forward switching scheme • Full/half-duplex for Ethernet/Fast Ethernet speeds • Supports 9,216 byte jumbo frames • Back pressure at half-duplex operation • Wire-speed reception and transmission • Store and-Forward switching method • Auto-negotiation for each port • QoS (4 queues, strict mode)
Data Transfer Rates	<ul style="list-style-type: none"> • Ethernet: <ul style="list-style-type: none"> • 10 Mbps (half duplex) • 20 Mbps (full duplex) • Fast Ethernet: <ul style="list-style-type: none"> • 100 Mbps (half duplex) • 200 Mbps (full duplex) 	<ul style="list-style-type: none"> • Ethernet: <ul style="list-style-type: none"> • 10 Mbps (half duplex) • 20 Mbps (full duplex) • Fast Ethernet: <ul style="list-style-type: none"> • 100 Mbps (half duplex) • 200 Mbps (full duplex)
Transmission Method	• Store-and-forward	• Store-and-forward
MAC Address Table Size	• 8,000	• 8,000

16/24-Port 10/100 Mbps Unmanaged Switch

Packet Filtering/Forwarding Rates	<ul style="list-style-type: none"> Ethernet: 14,880 pps per port Fast Ethernet: 148,800 pps per port 	<ul style="list-style-type: none"> Ethernet: 14,880 pps per port Fast Ethernet: 148,800 pps per port
RAM Buffer	<ul style="list-style-type: none"> 256 KB per device 	<ul style="list-style-type: none"> 256 KB per device
Physical	DES-1016C	DES-1024C
LED Indicators	<ul style="list-style-type: none"> Per port: Link/Activity/Speed Per device: Power 	<ul style="list-style-type: none"> Per port: Link/Activity/Speed Per device: Power
Media Interface Exchange	<ul style="list-style-type: none"> Auto MDI/MDIX adjustment for all ports 	<ul style="list-style-type: none"> Auto MDI/MDIX adjustment for all ports
Dimensions	<ul style="list-style-type: none"> 282.2 x 151 x 44.5 mm (11.11 x 5.94 x 1.75 inches) 	<ul style="list-style-type: none"> 282.2 x 151 x 44.5 mm (11.11 x 5.94 x 1.75 inches)
Weight	<ul style="list-style-type: none"> 1.06 kg (2.34 lbs) 	<ul style="list-style-type: none"> 1.14 kg (2.51 lbs)
Power	<ul style="list-style-type: none"> 100 to 240 V AC 	<ul style="list-style-type: none"> 100 to 240 V AC
Power Consumption	<ul style="list-style-type: none"> Power On (Standby): 0.79 watts Maximum: 5 watts 	<ul style="list-style-type: none"> Power On (Standby): 1.25 watts Maximum: 6 watts
Temperature	<ul style="list-style-type: none"> Operating: 0 to 40 °C (32 to 104 °F) Storage: -40 to 70 °C (-40 to 158 °F) 	<ul style="list-style-type: none"> Operating: 0 to 40 °C (32 to 104 °F) Storage: -40 to 70 °C (-40 to 158 °F)
Humidity	<ul style="list-style-type: none"> Operating: 10% to 90% non-condensing Storage: 5% to 95% non-condensing 	<ul style="list-style-type: none"> Operating: 10% to 90% non-condensing Storage: 5% to 95% non-condensing
MTBF	<ul style="list-style-type: none"> 1,215,319 hours 	<ul style="list-style-type: none"> 952,099 hours
Maximum Heat Dissipation	<ul style="list-style-type: none"> 22.75 BTU/h 	<ul style="list-style-type: none"> 27.3 BTU/h
Certifications	<ul style="list-style-type: none"> CE Class B CE (LVD 2006/95/EC) 	<ul style="list-style-type: none"> CE Class B CE (LVD 2006/95/EC)
Order Information		
<i>Part Number</i>	<i>Description</i>	
DES-1016C	16-Port 10/100 Mbps Unmanaged Switch	
DES-1024C	24-Port 10/100 Mbps Unmanaged Switch	

Updated 2015/11/30