


Model No. SP1103E

Cat.5e (FTP) Bulk Cable

305 m (1,000 ft.), Solid

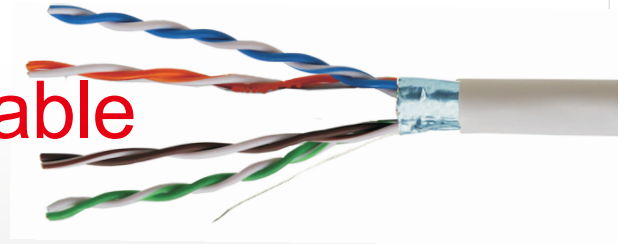

Introduction


Micronet SP1103E Cat.5e Bulk Cable networks the infrastructure that enables high-Speed transmission of data, voice and video applications - up to 100 MHz.

This Cat.5e Bulk Cable meets ANSI/TIA standards, and is flame-retardant rated.


Key Features

- Standards tested: meets or exceeds current Cat.5e proposed standards
- Length usage log on box: track remaining cable available for next job
- FTP (Shielded twisted pair)
- For Data, Voice and Video
- Flame retardant rating: CM; in-wall rated; permitted in one- and two-family residential riser applications, or in riser with raceway/fireproof shaft; not permitted in plenums

Application

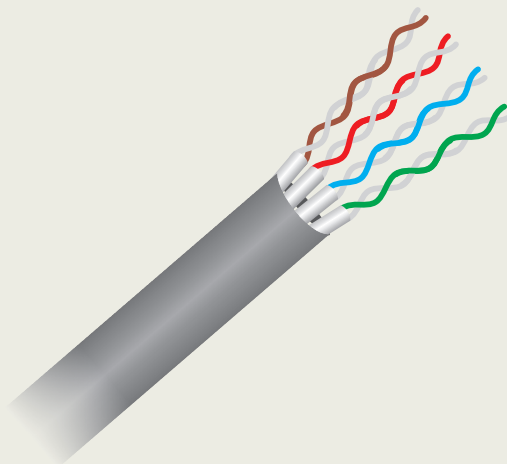

Cat. 5e cable

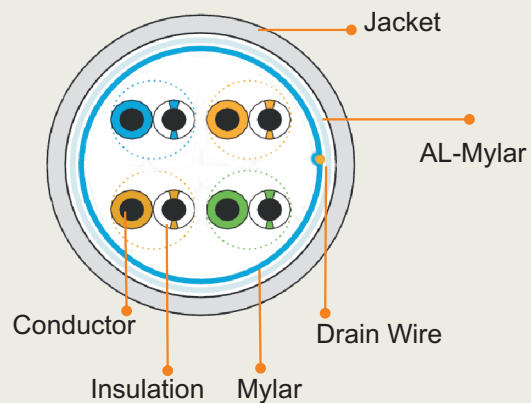

Cat.5e (FTP) Bulk Cable

SPECIFICATION AND PRODUCT FEATURES

Model	SP1103E		
Category	Cat.5e		
Cable Type	FTP		
Wiring Standard	ANSI/TIA-568C.2 & UL444 & ISO/IEC 11801		
Length (M)	305		
Certification	UL		
Construction			
Conductor	Size	24Awg	
	Construction	Solid Bare Copper	
	Cond. Diam.	1/0.540±0.02 mm	
Insulation	Avg. Thick.	0.245 mm	
	Min. Thick.	0.235 mm	
	Diameter	1.03 ± 0.02 mm	
	Material	Polyloefin (P O)	
	Color Codes	1. Blue × White/Blue Stripe 2. Orange × White/Orange Stripe 3. Green × White/Green Stripe 4. Brown × White/Brown Stripe	
Shielded	Pair Stranded	2 Cores Stranded	
	Assembly Stranded	4 Pair Stranded	
	Mylar Tape	20 × 0.025 mm	
	Drain Wire	24AWG Tinned Copper	
	Al-Mylar Tape	20 × 0.065 mm	
Jacketed	Avg. Thick.	0.50 mm	
	Min. Thick.	0.47 mm	
	Diameter	6.00 ± 0.20 mm	
	Material	FRPVC	
	Color	Gray or Other Color	
Electrical & Physical Properties			
Item	24Awg × 4P		
Rating Temp Voltage	75°C 300V		
Conductor Resistance	9.38 OHM/100M/20°C Max.		
Dielectric Strength	AC 1.5 KV/2 Sec.		
Spark Test	2.5 KV		
Insulation	Unaged	Tensile Strength	2400 Psi Min. (1.69 Kg/M ²)
		Elongation	300% Min.
	Aged	Tensile Strength	Unaged Min. 75% (100°C x 48Hrs)
		Elongation	Unaged Min. 75% (100°C x 48Hrs)
Jacketed	Unaged	Tensile Strength	2000 Psi Min. (1.41 Kg/M ²)
		Elongation	100% Min.
	Aged	Tensile Strength	Unaged Min. 85% (100°C x 240Hrs)
		Elongation	Unaged Min. 50% (100°C x 240Hrs)
Insulation Shrinkback	150m/m, 121°C±1°C×1HR ≤ 9.5m/m		
Cold Bend Test	-20°C×4HRS No.Crack		
Flame Retardant Test	CM		
Ac Leakage Current Through Overall Jacket	AC 1500V ≤ 10 mA		
Dc Resistance Unbalance	5% Max.		
Pair-To-Ground Capacitance Unbalance	330 pF/100m Max.		
Characteristic Impedance	1 ~ 100 MHz 100±15 Ohms		
Propagation Delay	100 MHz 538nS/100m Max.		
Delay Skew	1 ~ 100 MHz 45nS/100m Max.		

The product specifications are subject to change without prior notice

ORDERING INFORMATION

Model	Description
SP1103E-305	Cat.5e (FTP) Bulk Cable

Micronet Communications Inc.

E-mail: sales@micronet.com.tw ; support@micronet.com.tw ; Web: www.micronet.com.tw



Model No. SP1103E
Cat.5e (FTP) Bulk Cable

COMPANION PRODUCTS

Consider the following Micronet products as a factor in your network planning.

Ethernet and PoE

Wireless LAN

Broadband • ADSL & VDSL

Network Video Surveillance

Network / Server Appliance

Network Structured Cabling

Copyright © 2012 Micronet Communications Inc. All technical information in this document is subject to change without prior notice. Micronet, EtherFast and MicroView are registered trademarks of Micronet Communications Inc. All other trademarks and registered trademarks are properties of their respective holders.

Distributed By:

