


Cat.6 (UTP) Bulk Cable

Model No. SP1101S

305 m (1,000 ft.), Solid

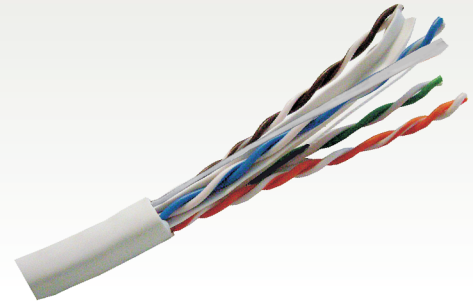

Introduction



Micronet SP1101S Cat.6 Bulk Cable networks the infrastructure that enables high-speed transmission of data, voice and video applications - up to 250 MHz.

This Cat.6 Bulk Cable meets ANSI/TIA standards, and is flame-retardant rated.

Key Features

- Standards tested: meets or exceeds current Cat.6 proposed standards
- Length usage log on box: track remaining cable available for next job
- UTP (unshielded twisted pair)
- For Data, Voice and Video
- Flame retardant rating: CM; in-wall rated; permitted in one- and two-family residential riser applications, or in riser with raceway/fireproof shaft; not permitted in plenums

Application

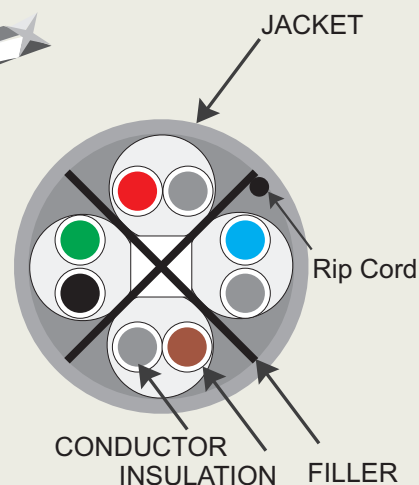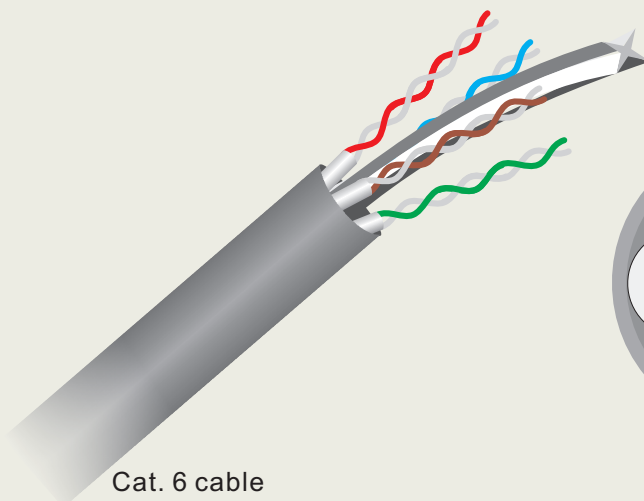

Cat.6 (UTP) Bulk Cable

SPECIFICATION AND PRODUCT FEATURES

Model	SP1101S		
Category	Cat.6		
Cable Type	UTP		
Wiring Standard	AN SI/TIA-568C.2, UL444 & ISO/IEC 11801		
Length (M)	305		
Certification	UL		
Construction			
Conductor	Size	24Awg	
	Construction	Solid Bare Copper	
	Cond. Diam.	1/0.540±0.02 mm	
Insulation	Avg. Thick.	0.22 mm	
	Min. Thick.	0.21 mm	
	Diameter	0.98 ± 0.02 mm	
	Material	Polyolefin (PO)	
	Color Codes	1. Blue × White/Blue Stripe 2. Orange × White/Orange Stripe 3. Green × White/Green Stripe 4. Brown × White/Brown Stripe	
Twist/Assembly	Description	Left Hand Direction	
Rip Cord	Material	Polyester multi-yarn	
Shielded	Filler(Slot)	Polyolefin (PO)	
	Avg. Thick.	0.50 mm	
	Min. Thick.	0.45 mm	
	Diameter	5.80 ± 0.2 mm	
	Material	FRPVC	
Jacketed	Color	Gray or Other Color	
	Electrical & Physical Properties		
Item	24Awg × 4P		
Rating Temp Voltage	75°C 300V		
Conductor Resistance	9.38 OHM/100M/20°C Max.		
Mutual Capacitance	56 pF/M Max.		
Dielectric Strength	AC 1.5 KV/2 Sec.		
Spark Test	2.5 KV		
Insulation	Unaged	Tensile Strength	2400 Psi Min. (1.69 Kg/M M ²)
		Elongation	300% Min.
	Aged	Tensile Strength	Unaged Min. 75% (100°C x 48Hrs)
		Elongation	Unaged Min. 75% (100°C x 48Hrs)
Jacketed	Unaged	Tensile Strength	2000 Psi Min. (1.41 Kg/M M ²)
		Elongation	100% Min.
	Aged	Tensile Strength	Unaged Min. 85% (100°C x 240Hrs)
		Elongation	Unaged Min. 50% (100°C x 240Hrs)
Insulation Shrinkback	150m/m, 121°C ± 1°C × 1HR ≅ 9.5m/m		
Cold Bend Test	-20°C × 4HRS No.Crack		
Flame Retardant Test	CM		
Ac Leakage Current Through Overall Jacket	AC 1500V ≅ 10 mA		
Dc Resistance Unbalance	5% Max.		
Pair-To-Ground Capacitance Unbalance	330 pF/100m Max.		
Characteristic Impedance	1 ~ 250 MHz 100 ± 15 Ohms		
Structural Return Loss	250 MHz 13.2dB Min.		
Propagation Delay	250 MHz 536.3nS/100m Max.		
Delay Skew	1 ~ 250 MHz 45nS/100m Max.		

The product specifications are subject to change without prior notice

ORDERING INFORMATION

Model	Description
SP1101S-305	Cat.6 (UTP) Bulk Cable

Micronet Communications Inc.

E-mail: sales@micronet.com.tw ; support@micronet.com.tw ; Web: www.micronet.com.tw



Model No. SP1101S
Cat.6 (UTP) Bulk Cable

COMPANION PRODUCTS

Consider the following Micronet products as a factor in your network planning.

Ethernet and PoE

Wireless LAN

Broadband • ADSL & VDSL

Network Video Surveillance

Network / Server Appliance

Network Structured Cabling

Copyright © 2012 Micronet Communications Inc. All technical information in this document is subject to change without prior notice. Micronet, EtherFast and MicroView are registered trademarks of Micronet Communications Inc. All other trademarks and registered trademarks are properties of their respective holders.

Distributed By:

