VOICE Patch Panel

Datasheet: GD035404v6



APPLICATION

Brand-Rex 19" rack mounted Unscreened RJ45 ISDN/Telephone patch panels are available in 1U 25 & 50 port versions to ensure maximum utilisation of cabinet space. In addition to this, all panels are supplied with a central & side cable anchor features & dual earthing points. All outlets are numerically identified. Each panel is supplied with wiring label, cable ties, and panel mounting accessories, pair manager, earth lead & short form installation instruction.

FEATURES

- 25 & 50 port versions available
- 4 and 6 pin versions available
- Rugged construction
- 19" rack compatible
- Durable powder coat finished in black or grey





ORDER INFO

Brand-Rex Part Number	Item Description	Colour	Weight per Item (nom)	Qty per Pack
C5CPNLU254PK8	25 way 1U UTP Telephone Panel 4 Pin (36,45)	Grey	670g	1
C5CPNLU504PK8	50 way 1U UTP Telephone Panel 4 Pin (36,45)	Grey	710g	1
C5CPNLU254PK2	25 way 1U UTP Telephone Panel 4 Pin (36,45)	Black	670g	1
C5CPNLU504PK2	50 way 1U UTP Telephone Panel 4 Pin (36,45)	Black	710g	1
C5CPNLU256PK2	25 way 1U UTP Telephone Panel 6 Pin (12,36,45)	Black	670g	1
C5CPNLU506PK2	50 way 1U UTP Telephone Panel 6 Pin (12,36,45)	Black	710g	1



PHYSICAL CHARACTERISTICS

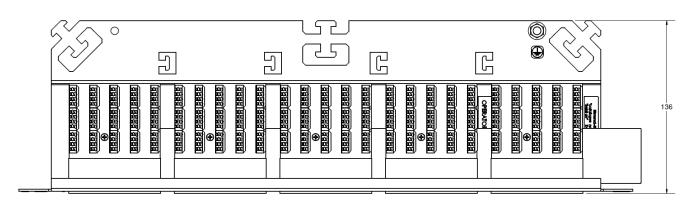



MATERIALS

Chassis -Aluminium

INSTALLATION

- Outlet: 8pin RJ45 Unkeyed
- IDC: LSA Style Insulation Displacement Connectors (IDC)suitable for both solid & stranded wire 26AWG (0.4mmØ) – 22 AWG (0.64mmØ)

STANDARDS

- Applicable Standards:
 - o Class C TIA/EIA 568B.2.1,
 - o EN 50173-1
 - o ISO/IEC 11801

CONFORMANCE

- 4pin TIA/EIA 568B.2.1 CAT3 (2 pair)
- 6pin TIA/EIA 568B.2.1 CAT3 (3 pair)

ACCESSORY KIT

- 1x 2m 1.5mm² flexible earth Lead,
- 1x Cable manager with self adhesive strip,
- 10x 100mm cable ties,
- 4 x M6 Caged Nuts
- 4 x M6 x 20mm PH slotted screws
- 4 X M6 Black Cup washers

"Brand-Rex is **dedicated** to **designing**, **developing** and **manufacturing** sustainable **high performance** structured cabling and speciality **cabling solutions**"

The information contained in this document is valid and correct at the time of issue. Brand-Rex reserves the right to modify details without notice in light of subsequent standard/specification changes and ongoing technical developments.